



TECHNICAL DATA:





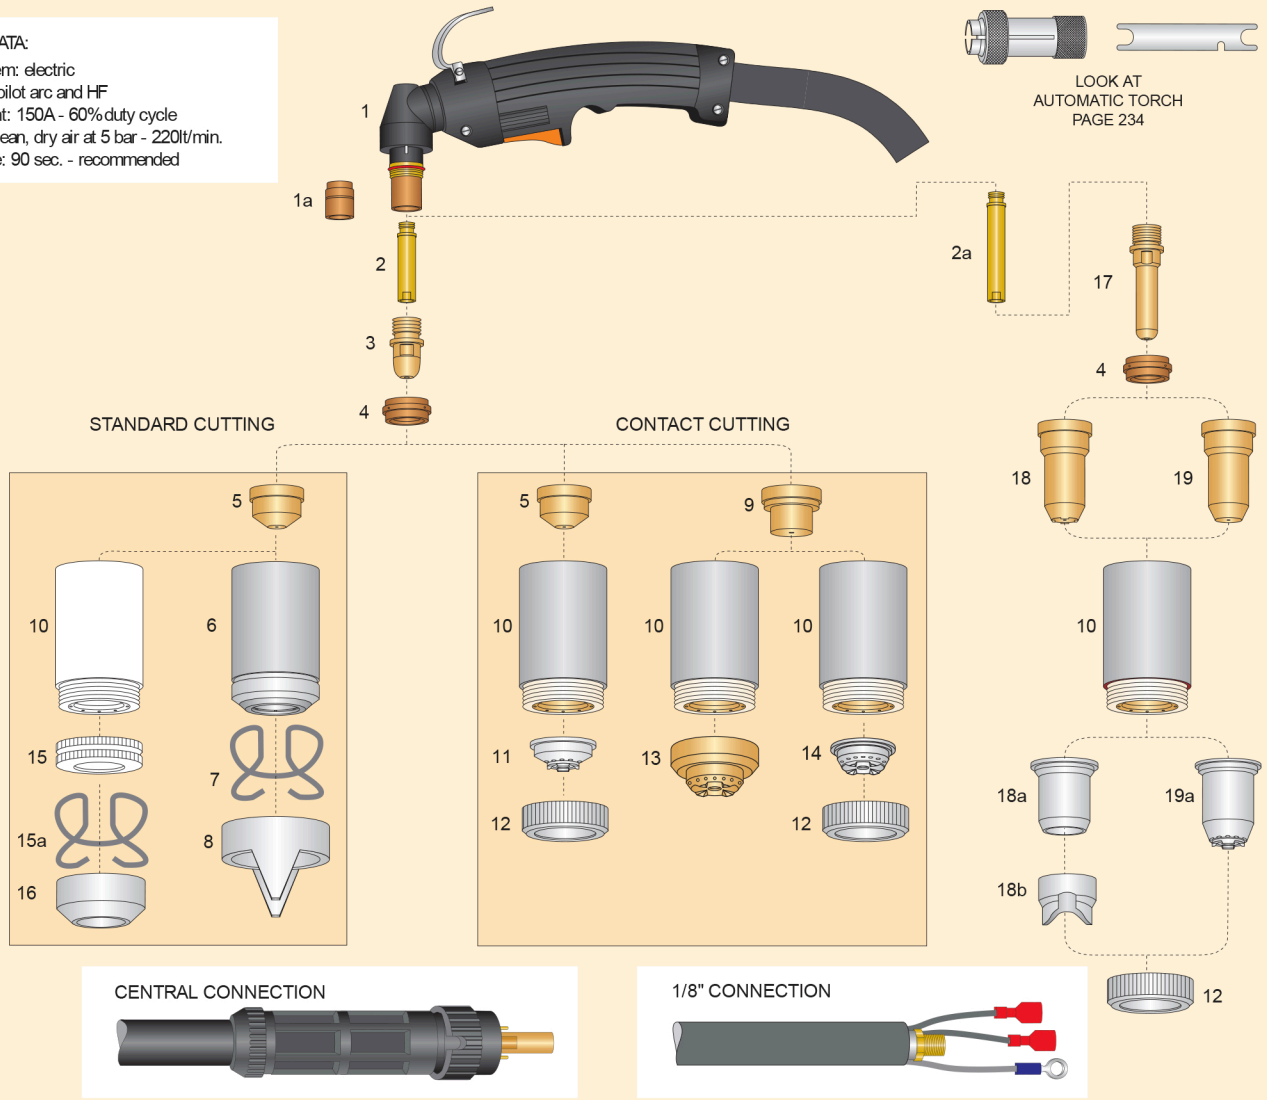




















Security system: electric
 Ignition: with pilot arc and HF
 Cutting current: 150A - 60% duty cycle
 Gas supply: clean, dry air at 5 bar - 220l/min.
 Post flow time: 90 sec. - recommended



LOOK AT
 AUTOMATIC TORCH
 PAGE 234



ITEM	Part. No	DESCRIPTION	ORIGINAL REF.	PACK		
	PLP150.6.18	Torcia completa Mt. 6 term. 1/8"	- Complete Torch 6 Mts (1/8" connection)	1571	1	
	PLP150.6.C	Torcia completa Mt. 6 term. centralizzato	- Complete Torch 6 Mts (Central connection)	1576	1	
	PLP150.12.18	Torcia completa Mt. 12 term. 1/8"	- Complete Torch 12 Mts (1/8" connection)		1	
	PLP150.12.C	Torcia completa Mt. 12 term. centralizzato	- Complete Torch 12 Mts (Central connection)	1578	1	
	PLCP160.6.C	Torcia completa 160 Mt. 6 term. centralizzato	- Complete Torch CP 160 6 Mts (Central connection)	1226	1	
	PLCP160.12.C	Torcia completa 160 Mt. 12 term. centralizzato	- Complete Torch CP 160 12 Mts (Central connection)	1226.20		
	FLCE150.08	Impugnatura	- Handgrip		1	
	02.09.A.BZ	Pulsante	- Switch		2	
	1	FLCE150.06	Corpo torcia	- Torch head	1353	1
		FLORING.2	O-Ring	- O-Ring	1354	20
		FLCE150.061	1a Isolante per corpo torcia VESPEL [®]	- Front insulator - VESPEL [®]		1
		FLCE150.05.1	2 Tubetto ottone - prolunga	- Diffusor	1378	10
		FLCE150.05.1L	2a Tubetto ottone - prolunga - lungo	- Extended diffusor		10
	3	FLCE150.01	Betrodo Hf	- Electrode - Hf	1376	10
	4	FLCE150.05	Diffusore Aria VESPEL [®]	- Swirl ring - VESPEL [®]	1377	10
	5	FLCE150.02.11	Ugello rame STD Ø1,1 mm.	- Tip Ø1,1 mm.	1371	10
		FLCE150.02.13	Ugello rame STD Ø1,35 mm.	- Tip Ø1,35 mm.	1372	10
		FLCE150.02.16	Ugello rame STD Ø1,6 mm.	- Tip Ø1,6 mm.	1373	10
		FLCE150.02.18	Ugello rame STD Ø1,8 mm.	- Tip Ø1,8 mm.	1374	10
		FLCE150.02.30	Ugello rame Gouging Ø3,0 mm.	- Gouging tip Ø3,0 mm.	1375	10

ITEM	Part. No	DESCRIPTION	ORIGINAL REF.	PACK		
5		PLCE150.02.13S	Ugello rame long life Ø1,35 mm.	- Tip long life Ø1,35 mm.	10	
		PLCE150.02.16S	Ugello rame long life Ø1,6 mm.	- Tip long life Ø1,6 mm.	10	
		PLCE150.02.18S	Ugello rame long life Ø1,8 mm.	- Tip long life Ø1,8 mm.	10	
6		PLCE150.03	Ugello esterno Long Life	- Outside nozzle long life	1389	
		PLCE150.04	Molla distanziatrice	- Spacer spring	1386	
7						
8		PLCE150.04.2	Distanziale 2 punte	- Double pointed spacer	1408	
		PLCE150.04.4P	Distanziale 4 punte - corona	- Crown spacer	10	
		PLCE150.04.4S	Distanziale scriccata	- Gouging spacer	1406	
						
9		PLCE150.02C13	Ugello rame taglio a contatto Ø1,35 mm.	- Contact tip Ø1,35 mm.	10	
		PLCE150.02C16	Ugello rame taglio a contatto Ø1,6 mm.	- Contact tip Ø1,6 mm.	10	
		PLCE150.02C18	Ugello rame taglio a contatto Ø1,8 mm.	- Contact tip Ø1,8 mm.	10	
10		PLCE150.03.C	Porta ugello esterno taglio contatto long life	- Contact outside nozzle long life	10	
		PLCE150.03.CV	Porta ugello esterno taglio contatto long life VESPEL®	- Contact outside nozzle VESPEL®	10	
11		PLCE150.04.OM	Distanziale per taglio a contatto manuale	- Spacer for contact cutting, hand	 10	
12		PLCE150.04.GD	Ghiera di chiusura distanziale taglio a contatto	- Locking nut	10	
13		PLCE150.04.CV	Distanziale rame taglio a contatto manuale V.T.con ugello piatto	- Shield cup for contact tip, hand old type	10	
14		PLCE150.04.CP	Distanziale rame taglio a contatto manuale con ugello piatto	- Spacer for contact cutting	10	
15		PLCE150.44.01	Porta molla	- Spring holder protection nut	10	
		PLCE150.44.02	Molla distanziatrice	- Spacer spring for protection nut	10	
		PLCE150.44.03	Distanziale per scricatura	- Gouging spacer		
15a						
16						
17		PLCE150.01.L	Elettrodo lungo Hf	- Long electrode - Hf	1517	
18		18a	PLCE150.02.L	Ugello rame lungo 50 A taglio a contatto	- Contact long tip max 50A	1369
			PLCE150.04.L	Protezione ugello rame lungo 50 A taglio a contatto	- Shield cup for long tip, hand	10
			PLCE150.44.05	Dist. ugello lungo alto amp.	- Spacer for extended tips high amp.	10
18b					 10	
19		19a	PLCE150.0213L	Ugello rame lungo Ø1,35 mm. 90A	- Long tip Ø1,35 mm. - 90A	10
			PLCE150.0216L	Ugello rame lungo Ø1,6 mm. 120A	- Long tip Ø1,6 mm. - 120A	10
			PLCE150.0218L	Ugello rame lungo Ø1,8 mm. 150A	- Long tip Ø1,8 mm. - 150A	10
			PLCE150.04L1	Protezione ugello lungo 90A-150A	- Shield cup for long tip - 90A-150A	 10
		PLCE150.04.3	Distanziale lungo completo di molla	- Spacer complete with spring	10	
		PLCE150.04.4	Molla per distanziale lungo	- Spring for spacer	10	
		PLCE150.20.1	Pacco cavi completo da Mt. 6	- Complete cable 6 Mts		
		PLCE150.20.2	Pacco cavi completo da Mt. 12	- Complete cable 12 Mts		
		PLCE150.20.3	Cavo portacorrente Mt. 6	- Power cable only, 6 Mts		
		PLCE150.20.4	Cavo portacorrente Mt. 12	- Power cable only, 12 Mts		